

KFI-35P

光纤信号识别仪



特征描述

- 全金属机身，CNC精加工
- 四种夹具，操作简单，易更换
适用于0.25/0.9/2.0/3.0 mm光纤线
- 识别270Hz / 1kHz / 2kHz信号频率
并有蜂鸣提示音
- 识别光纤信号方向,操作简单实用
- 单模多模光纤通用
- 内置LED灯，便于黑暗中查线施工
- LED显示屏，放光均匀，显示清晰
- 配置OPM功能，2.5mm通用接口

自带OPM功能

可选7种测试波长

850nm

980nm

1300nm

1310nm


1490nm

1550nm

1625nm


2.5mm通用接口

支持SC/ST/FC接口

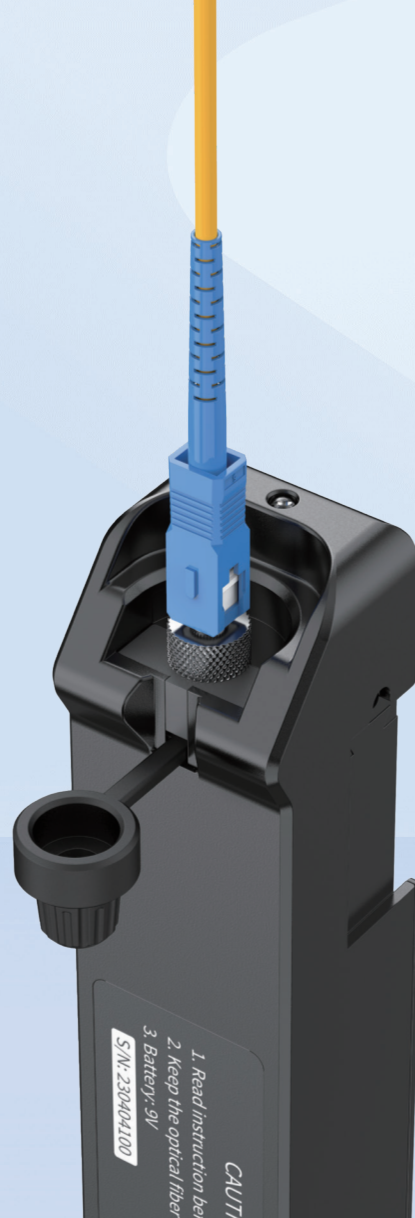

高亮LED照明

配备高亮LED手电，便于在黑暗环境下操作施工

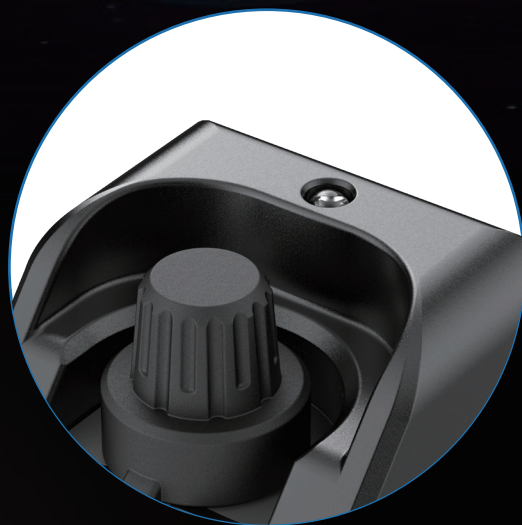


夹具存储仓设计

夹具存储仓设计，储存方便，避免夹具丢失



一键开启 快速测试

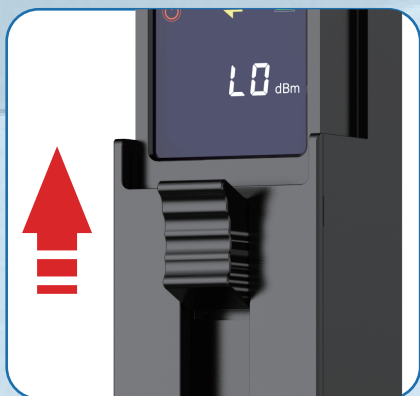

向上推动，开始测试



4种夹具 操作简单 易更换



3.0mm跳线



2.0mm跳线



0.9mm尾纤



0.25mm裸纤



夹具

屏幕显示

识别仪开启键

LED键

波长+DB/REF键

电池盖

夹具存储仓

拉绳

防尘帽

OPM接口

LED灯珠

按键说明




OFI功能

1. 开关机：推上扳机，机器开机；扣下扳机，机器关闭
2. 识别仪校准：  同时摁校准显示-10，自动保存退出

OPM功能

1. LED：短按  LED开关，长按  切换OPM和OFI模式，显示对应图标；
 2. 波长+DB/REF：短按  切换波长，长按  切换单位；
 3. REF：LED 灭的前提下，  同时摁清零；
- opm校准：短按  打开LED，再  +  进入校准模式，显示固定数值-10，短按  切换波长， +  保存退出

产品展示

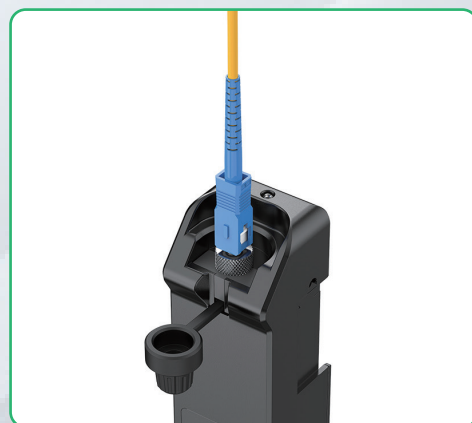



型号	KFI-35P
光纤识别范围	800-1700 nm
光纤类型	3.0mm、2.0mm、250μm、900μm
识别信号频率	270Hz、1kHz、2kHz
准确度	+10dB ~ -30dBm (连续波)
	+10dB ~ -25dBm (调制信号)
敏感度范围	+10 ~ -50 dBm
电池	9 V x 1
外观尺寸	241 x 31 x 40 mm
重量	299g (含电池)

OPM功能

波长范围	800~1700nm
功率测量范围	-70 ~ +6dBm / -50 ~ +26dBm
标准波长	850/980/1300/1310/1490/1550/1625nm
连接器	2.5mm通用适配器
探头类型	InGaAs
显示分辨率	0.01dB
精确度	±0.2dB

江苏吉星光通讯科技有限公司

地 址：江苏省南京市雨花区宁双路十八号沁恒科技园

网 址：www.komshine.com

邮 箱：info@komshine.com

电 话：13814897945

* KomShine reserves the right to improve, enhance, or modify the features and specifications of KomShine product without prior notification.

* Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.

* This catalogue is printed using environmentally friendly paper and ink.