

KFI-40V

高精度光纤识别仪




产品特性和功能

- 适用于0.25/0.9/2.0/3.0mm光纤
- LED背光显示, 适用各种环境, 无需辅助照明
- 测试灵敏度 -40 dBm to 10 dBm
- 携带方便, 使用时无需更换夹具
- 配置VFL功能, 2.5mm通用接口
- 内置LED灯, 黑暗中查线施工更便利
- 测试距离可达5km, 稳定性高
- 光源强劲稳定, 穿透力强

集成VFL光源 LED照明灯



多合一夹具

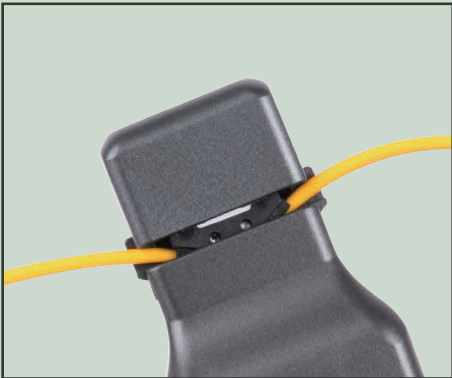

2.0/3.0mm跳线



0.9mm尾线



裸纤

产品展示



产品参数

型号	KFI-40V
波长识别范围	800nm to 1700nm
信号识别类型	CW, 270Hz \pm 5%, 1kHz 5%, 2kHz 5%
探测器类型	ϕ 1mm InGaAs 2 pcs
适配光纤类型	通用 ϕ 0.25(裸纤), ϕ 0.9, ϕ 2.0, ϕ 3.0 光纤线
信号方向	Left & Right LED
光功率读数范围	40 dBm to 10 dBm
信号频率范围	270Hz,1kHz,2kHz
电源类型	AA*2
工作温度范围	-10°C to 60°C
储存温度范围	25°C to 70°C
产品尺寸	219mm*45mm*28mm
产品重量	235g
VFL 功能	
功率范围	10mW
测试距离	5-8km
波长范围	650nm
激光器类型	LD
LED手电筒	Support

江苏吉星光通讯科技有限公司

地址:江苏省南京市雨花区宁双路十八号沁恒科技园

网址:www.komshine.com

邮箱:info@komshine.com

电话: 025-66047688

* Komshine reserves the right to improve, enhance, or modify the features and specification of KomShine products without prior notification.

*Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.

* This catalogue is printed using environmentally friendly paper and ink.