

QX45/QX35

光时域反射仪



主要特征

- 事件盲区<1.8m
- 波长：单模1310 / 1550nm
- 距离范围：0.3、1、3、5、10、30、60、120公里（单模）
- 3.5寸TFT-LCD（触摸屏）
- 一年保修
- USB 接口，支持PC同步软件分析，处理，生成，打印测试报告
- 内存容量 > 800 踪迹
- 内置4200mAh大容量锂电池
- 彩色液晶显示

支持四接口光纤类型



ST



FC




SC(可选)



LC(可选)

GUI 界面

更加友好简洁扁平化触摸界面，操作更简单，新手也能变专家。

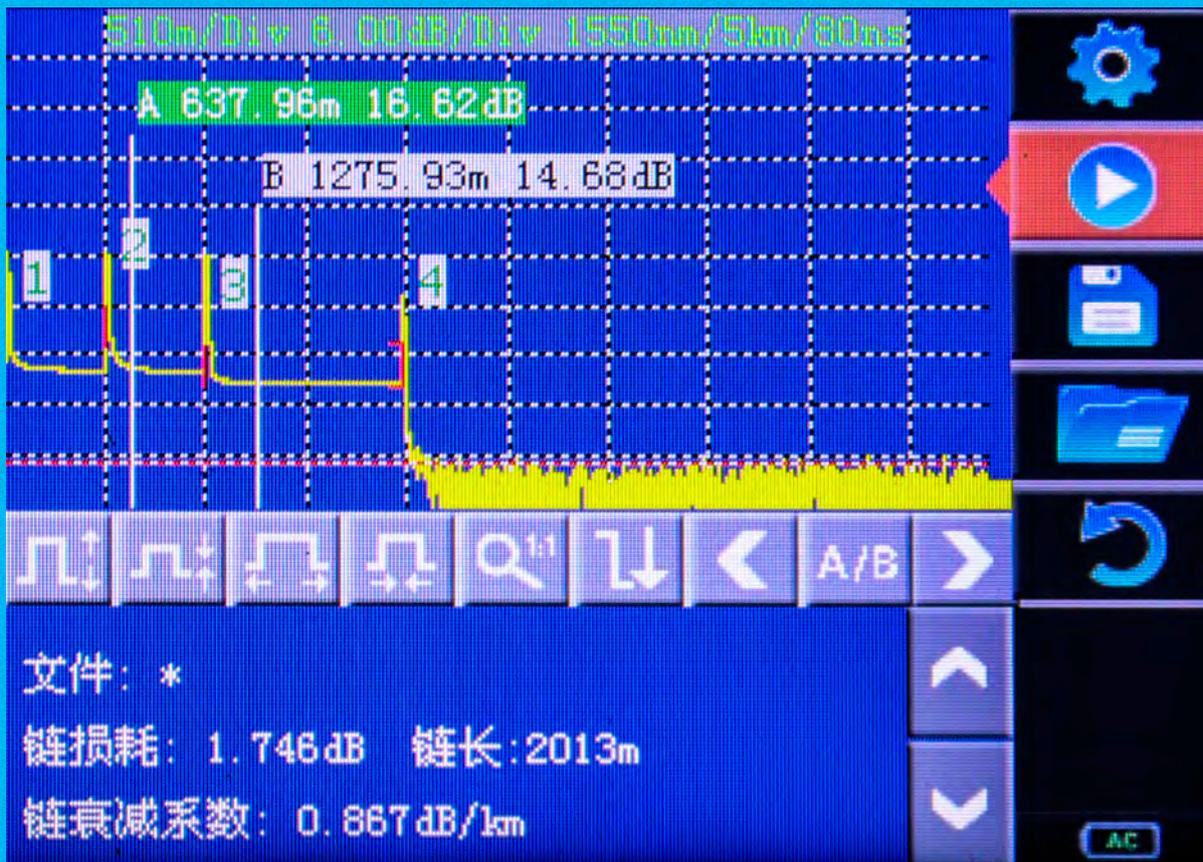

彩色触摸屏

触摸和按键设计，使操作更加多样化。从而满足不同的人的使用和操作习惯，提高工作效率。






15 小时




4200mAh



可循环



产品详情

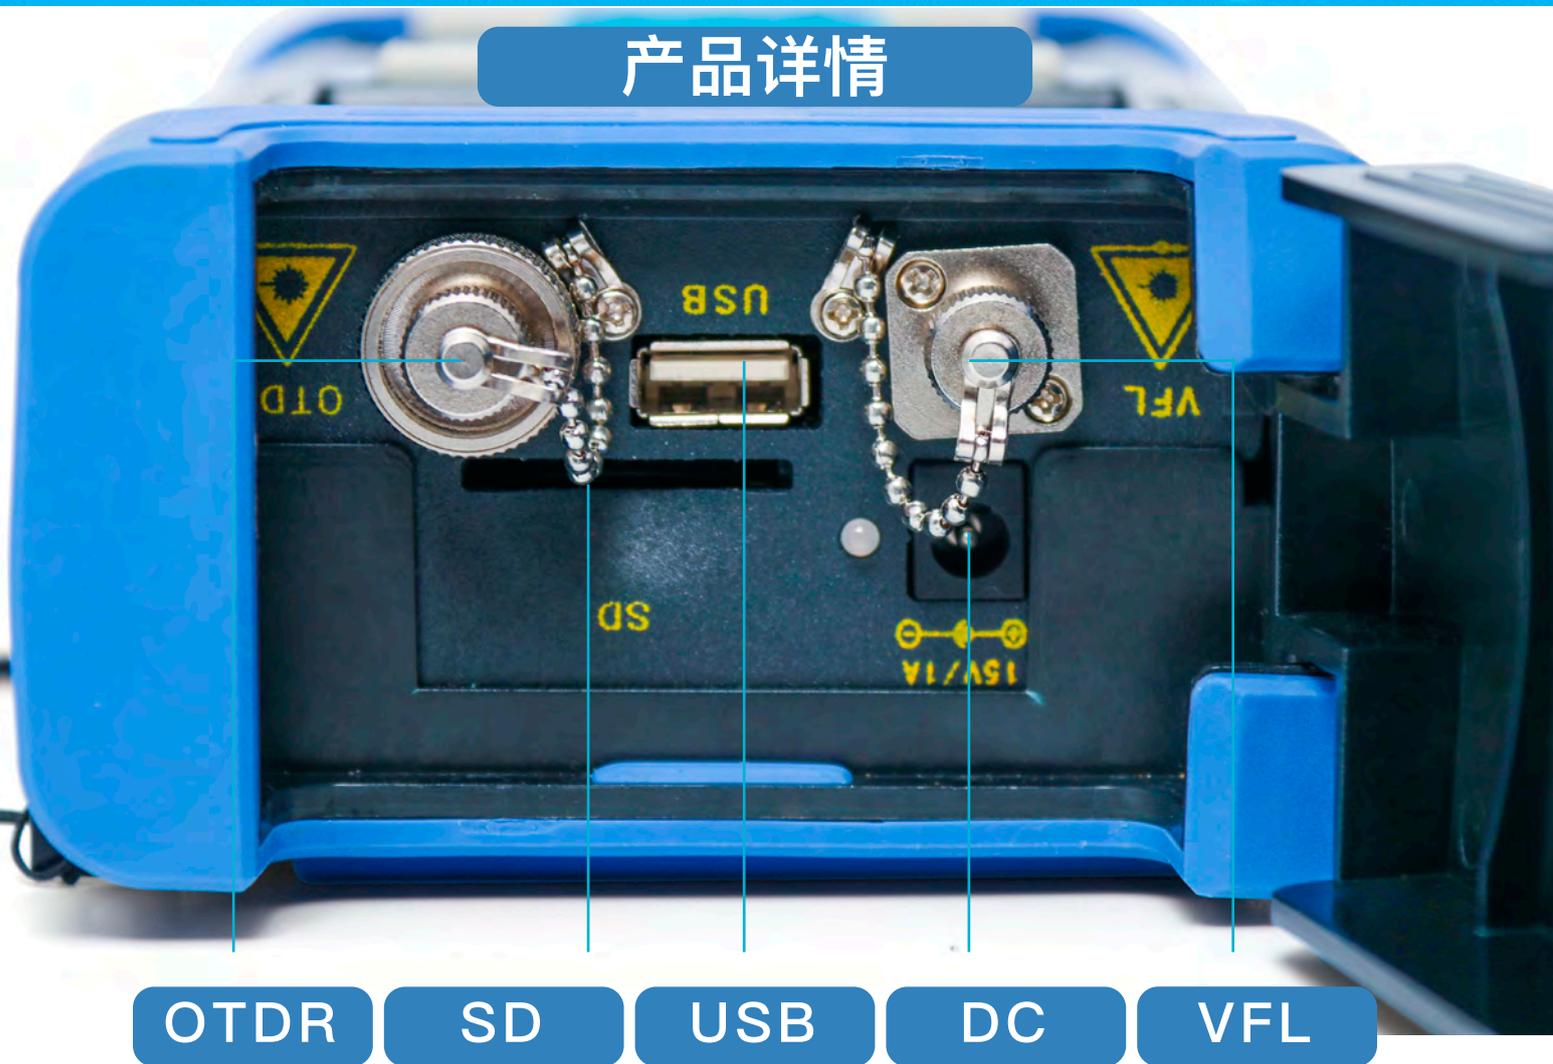

OTDR

SD

USB


DC

VFL

产品特点:



抗冲击



防水



防摔




防尘

产品规格:

类目	详情	
型号	QX-35	QX-45
波段	1550nm	1310nm/1550nm
动态范围	28dB	32dB/30dB
显示屏	3.5寸LCD屏幕	
光源类型	LD	
光纤接口	FC (LC,SC选配)	
脉冲宽度 (ns)	5、10、、20、40、80、160、320、640、1280、2560、5120、10240、20480	
测量时长	5秒、10秒、15秒、30秒、1分钟、2分钟、3分钟	
衰减盲区	10米	
事件盲区	3米	
距离不确定度 (m)	$\pm (1m+5 \times 10^{-5} \times \text{距离} + \text{取样间距})$	
迹线存储容量	SD卡 (8G) , >10000条	
尺寸 (H*W*D)	80*200*60mm	
重量	1.1kg	

配置表:

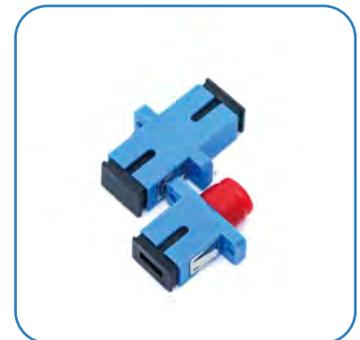

CONTACT US:

江苏吉星光通讯科技有限公司

HEAD OFFICE:

地址：江苏省南京市雨花区宁双路十八号沁恒科技园

电话：+ 86 25 8687 1288

传真：+ 86 25 8687 1288

网址：www.komshine.com

邮箱：sales@komshine.com

* Komshine reserves the right to improve, enhance, or modify the features and specifications of KomShine products without prior notification.

* Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.

* This catalogue is printed using environmentally friendly paper and ink.